

**ISUZU**  
LT 134



**LUXURY REDEFINED...**

## SPECIFICATIONS OF ISUZU LT 134PR BUS


<b>ENGINE</b>	
Model	6 HK1-TC EURO-III Compliant Rear Engine
TYPE	4 Stroke, 6 Cylinders, OHC (Over head cam) Direct Injection, Water Cooled Turbo Charger with Inter Cooler and EGR
Displacement (cc)	7790
Max. Power	230PS @ 2500 RPM
Torque	704.2Nm@1500RPM
<b>ELECTRICALS</b>	
Type	24 VOLTS
Battery	2 NOS, 12 V, 150 AH
Alternator	24V, 110A
<b>DRIVE TRAIN</b>	
Clutch	Cushioned Single Plate, Dry, Hydraulically Controlled, Air assisted.
Transmission	7 Foward, 1 Reverse Synchronesh with overdrive
<b>AXLES</b>	
Front Axle	Reverse Elliot "1" Beam Section
Rear Axle	Full Floating
<b>STEERING</b>	
Type	Power Steering, Re-Circulating Ball Type with Hydraulic Booster
<b>SUSPENSION (AIR SUSPENSION)</b>	
Front	Air Suspension with 2 Bellows
Rear	Air Suspension with 4 Bellows
<b>BRAKES</b>	
Service Brakes	Full Air, Dual Circuit, S-Cam Type with Auto Slack Adjuster
Parking Brake	Spring Actuator on Rear Wheels

Exhaust Brake	Electro-Pneumatic with butterfly Valve in Exhaust pipe, Inter Locking Actuator for exhaust Brake & Foot Brake with cancelling switch
<b>ABS</b>	Provided
<b>Retarder</b>	Provided
<b>Max Speed</b>	115 KM / HR
Gradeability	7 Deg
<b>SEATS</b>	
No. of Seats (Variants)	45+1+1
Type	Push Back, Reclining Comfortable Seats with padded Arm Rests and Foot Rest (varies with seats layout)
<b>DIMENSIONS</b>	
Wheel Base	6260 MM
Overall Length	11995 MM
Overall Width	2600 MM
Overall height	3800 MM
Turning Radius	11150 MM
Min. Ground Clearance	260 MM
<b>TRACK</b>	
Front	2016 MM
Rear	1816 MM
<b>WHEELS AND TYRES</b>	
Wheels	10 Stud Wheel Discs
<b>No. of Tyres</b>	
Size	11-R22.5 - 14 PR (BS)
Fuel Tank Capacity	380 LTRS



### SML ISUZU Limited

S.C.O. 204 - 205, Sector 34-A,  
Chandigarh - 160 135.  
Ph : 0172-2647700. Fax : 0172-2615111.  
E-mail : salesadm@smlisuzu.com

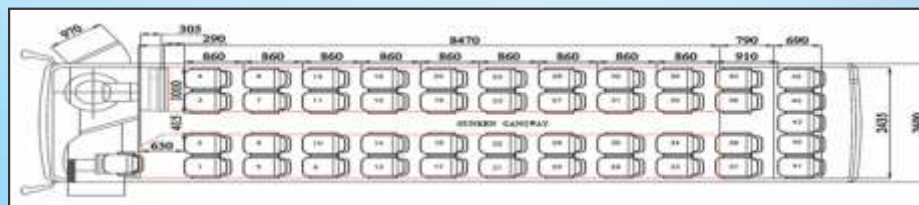

SEATING LAYOUT

Authorised Dealer :