

STRONG TRUCK at Optimum Price




samRat

SPECIFICATIONS

Model	Samrat BS-III		Samrat BS-IV
Engine & Displacement	SLT3 & Numeral , 3455 cc		SLT4 & Numeral , 3455 cc
Type	4-Cylinder in line -OHV		Comman Rail Cool EGR
	Diesel Turbo Charger with Intercooler		
Max.Engine Output	75 Kw @3000 rpm		75 Kw @2800 rpm
Max. Torque	270Nm@1750-2000 rpm		296Nm @ 1500 rpm
Clutch	Single plate Diaphragm Type , Dia. 260mm		
Gear Box	Synchromesh Manual 5-Forward and 1-Reverse		
Steering	Mechanical /Power Steering (Optional)		
Brakes	Air Brake		
Suspension	Semi Elliptical Type Multi Leaf Spring		
Wheels & Tyres	8.25" X 16" - 16 PR		
No of Tyres	6+1		
Wheelbase (mm)	3335	3940	4760
Min. Turning Circle Diameter in m	6.4	7.6	9.4
Front Axle Weight	3370	3370	3370
Rear Axle Weight	6880	6880	6880
Kerb Weight	3420	3550	3350
Max. Permissible GVW (kg)	10250		
Cargo Box Dimensions (LXBXH) in mm			
Variants			
Cab Halfdeck Loadbody	3740 X 2080 X 2070	5240 X 2080 X 2070	6610 X 2080 X 2070
Cab Semideck Loadbody	3740 X 2080 X 2092	5240 X 2080 X 2092	Not Available
Cab Highdeck Loadbody	3740 X 2080 X 2710	5240 X 2080 X 2710	Not Available
Cabin Chassis	Available		

NOTE : As our policy is that of continuous improvement, above specifications may change without notice.

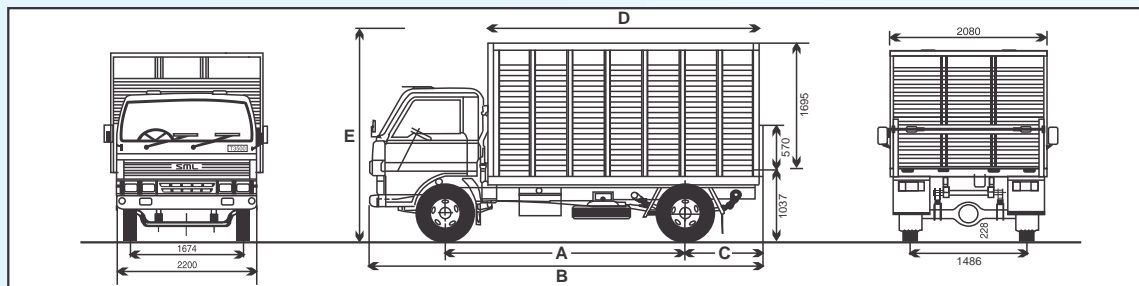

Authorised Dealer :



SML ISUZU Limited

S.C.O. 204 - 205, Sector 34-A, Chandigarh - 160 135. Ph : 0172-2647700. Fax : 0172-2615111.E-mail : salesadm@smlisuzu.com