

New Weight Lifting Champion



SARTAJ The Crowning Lorry


SPECIFICATIONS

Model	Sartaj BS-III	Sartaj BS-IV
Engine & Displacement	SLT3 & Numeral, 3455 cc	SLT4 & Numeral , 3455 cc
Type	4-Cylinder in line -OHV	Comman Rail Cool EGR
	Diesel Turbo Charger with Intercooler	
Max.Engine Output	75 Kw @3000 rpm	75 Kw @2800 rpm
Max. Torque	270Nm@1750-2000 rpm	296Nm @ 1500 rpm
Clutch	Single plate Diaphragm Type , Dia. 260mm	
Gear Box	Synchromesh Manual 5-Forward and 1-Reverse	
Steering	Mechanical /Power Steering (Optional)	
Brakes	Hydraulic Vaccume assisted	
Suspension	Semi Ellipitical Type Multi Leaf Spring	
Wheels & Tyres	8.25" X 16" - 16 PR	
No of Tyres	4+1	
Wheelbase (mm)	3335	
Min. Turning Circle Diameter in m	6.4	
Max. Permissible GVW (kg)	6140	
Front Axle Weight	2460	
Rear Axle Weight	3680	
Kerb Weight	2680	
Cargo Box Dimensions (LXBXH) in mm		
Variants		
Cab Semideck Loadbody	3740 X 2080 X 2092	
Cab Highdeck Loadbody	3740 X 2080 X 2710	
Cabin Chassis	Available	

NOTE : As our policy is that of continuous improvement, above specifications may change without notice.

Features

- Available in BS - III & BS - IV Versions. • Powerful Engine - Higher Pickup, Higher Torque at lower RPM, Gradeability and Fuel Efficiency.
- Heavy Duty Gear Box and Bigger Clutch - Longer Life. • Box Type Chassis with tubular cross members - carry more load, provide better Strength and Rigidity.
- Steering with variable Gear Ratio - Less Driver Fatigue. • Roof Ventilation, less Driver Fatigue and Better Comfort. • Ready availability of Spares at reasonable Price.

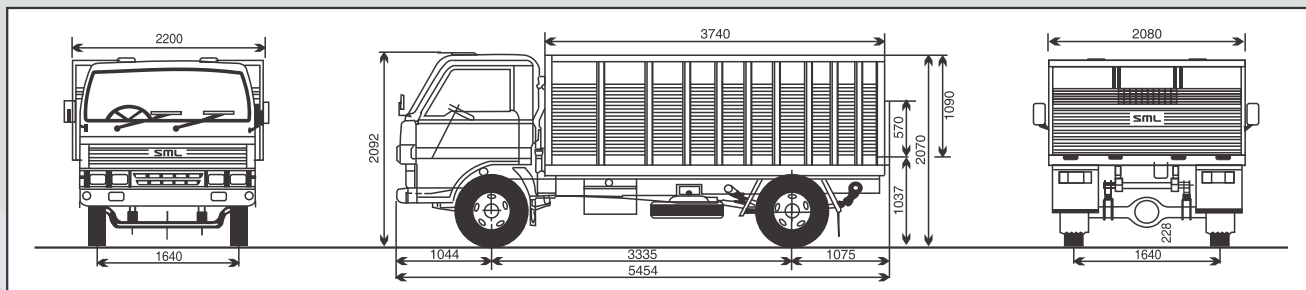

SML ISUZU Limited

S.C.O. 204 - 205, Sector 34-A,
Chandigarh - 160 135.

Ph : 0172-2647700. Fax : 0172-2615111.

E-mail : salesadm@smlisuzu.com

Authorised Dealer :