

# Multipurpose Carrier with Maxi Performance



**SUPER**






## SPECIFICATIONS

Model	Super BS-III		Super BS-IV	
Engine & Displacement	SLT3 & Numeral , 3455 cc		SLT4 & Numeral , 3455 cc	
Type	4-Cylinder in line -OHV		Comman Rail Cool EGR	
	Diesel Turbo Charger with Intercooler			
Max.Engine Output	75 Kw @3000 rpm		75 Kw @2800 rpm	
Max. Torque	270Nm@1750-2000 rpm		296Nm @ 1500 rpm	
Clutch	Single plate Diaphragm Type , Dia. 260mm			
Gear Box	Synchromesh Manual 5-Forward and 1-Reverse			
Steering	Mechanical /Power Steering (Optional)			
Brakes	Hydraulic Vaccume assisted /Air Brake (Optional)			
Suspension	Semi Elliptical Type Multi Leaf Spring			
Wheels & Tyres	7.50" X 16" -14PR/16 PR			
No of Tyres	6+1			
Wheelbase (mm)	2815 AB	3335	3940	4760
Min. Turning Circle Diameter in m	5.5	6.4	7.6	9.4
Front Axle Weight	3160	3160	3160	3160
Rear Axle Weight	5560	5560	5560	5560
Kerb Weight	3280	3070	3200	3000
Max. Permissible GVW (kg)	8720			
Cargo Box Dimensions (LXBXH ) in mm				
Variants				
Cab Halfdeck Loadbody	3100 X 2080 X 2070	3740 X 2080 X 2070	5240 X 2080 X 2070	6610 X 2080 X 2070
Cab Semideck Loadbody	3100 X 2080 X 2092	3740 X 2080 X 2092	5240 X 2080 X 2092	Not Available
Cab Highdeck Loadbody	3100 X 2080 X 2710	3740 X 2080 X 2710	5240 X 2080 X 2710	Not Available
Cabin Chassis	Available			

### Features

- Available in BS - III & BS - IV Versions.
- Powerful Engine - Higher Pickup, Higher Torque at lower RPM, Gradeability and Fuel Efficiency.
- Heavy Duty Gear Box and Bigger Clutch - Longer Life.
- Steering with variable Gear Ratio - Less Driver Fatigue.
- Roof Ventilation, less Driver Fatigue and Better Comfort.
- Ready availability of Spares at reasonable Price.

**NOTE :** As our policy is that of continuous improvement, above specifications may change without notice.

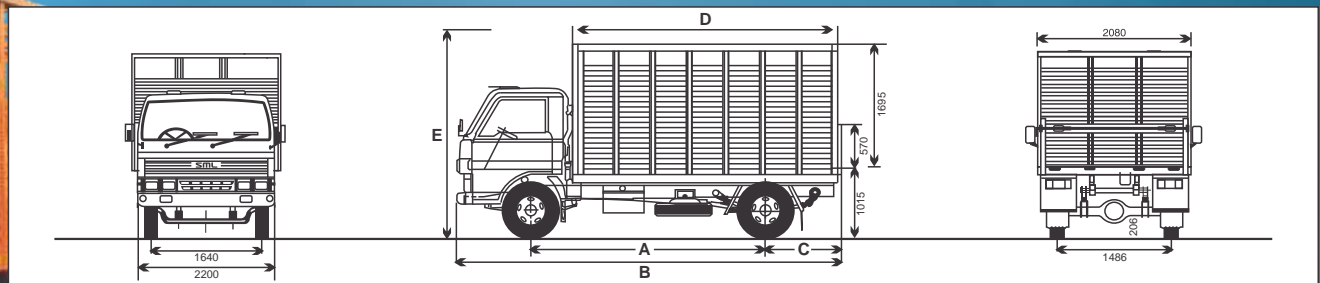

## SML ISUZU Limited

S.C.O. 204 - 205, Sector 34-A,  
Chandigarh - 160 135.  
Ph : 0172-2647700. Fax : 0172-2615111.  
E-mail : salesadm@smlisuzu.com

Authorised Dealer :