

COSMO

**MORE LOADING AREA
MORE PROFIT
LESS PRICE**



SPECIFICATIONS

Model	Cosmo BS-III	Cosmo BS-IV
Engine & Displacement	SLT3 & Numeral, 3455 cc	SLT4 & Numeral , 3455 cc
Type	4-Cylinder in line -OHV	Comman Rail Cool EGR
	Diesel Turbo Charger with Intercooler	
Max.Engine Output	75 Kw @3000 rpm	75 Kw @2800 rpm
Max. Torque	270Nm@1750-2000 rpm	296Nm @ 1500 rpm
Clutch	Single plate Diaphragm Type , Dia. 260mm	
Gear Box	Synchronmesh Manual 5-Forward and 1-Reverse	
Steering	Mechanical /Power Steering (Optional)	
Brakes	Hydraulic Vaccume assisted	
Suspension	Semi Ellipitical Type Multi Leaf Spring	
Wheels & Tyres	7.50" X 16" - 14PR/16 PR	
No of Tyres	4+1	
Wheelbase (mm)	2815	
Min. Turning Circle Diameter in m	5.5	
Max. Permissible GVW (kg)	5740	
Front Axle Weight	2580	
Rear Axle Weight	3160	
Kerb Weight	2520	
Cargo Box Dimensions (LXBXH) in mm		
Variants		
Cab Halfdeck Loadbody	3100 X 2080 X 2070	
Cabin Chassis	Available	

NOTE : As our policy is that of continuous improvement specifications may change without notice



Newly Introduced Features :

- ◆ Fuel Efficient Drive Line.
- ◆ Head Lamp Leveling Device.
- ◆ Cargo Box Lights.
- ◆ Enhanced aesthetic look with new graphics.
- ◆ Spray Suppression.
- ◆ Bigger Rear View Mirror.

SML ISUZU Limited

S.C.O. 204 - 205, Sector 34-A, Chandigarh - 160 135. Ph : 0172-2647700.
Fax : 0172-2615111. E-mail : salesadm@smlisuzu.com

SML ISUZU

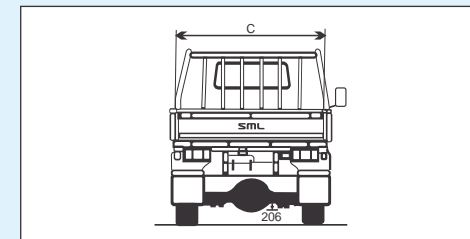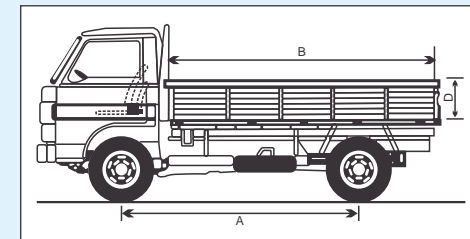

Authorised Dealer :